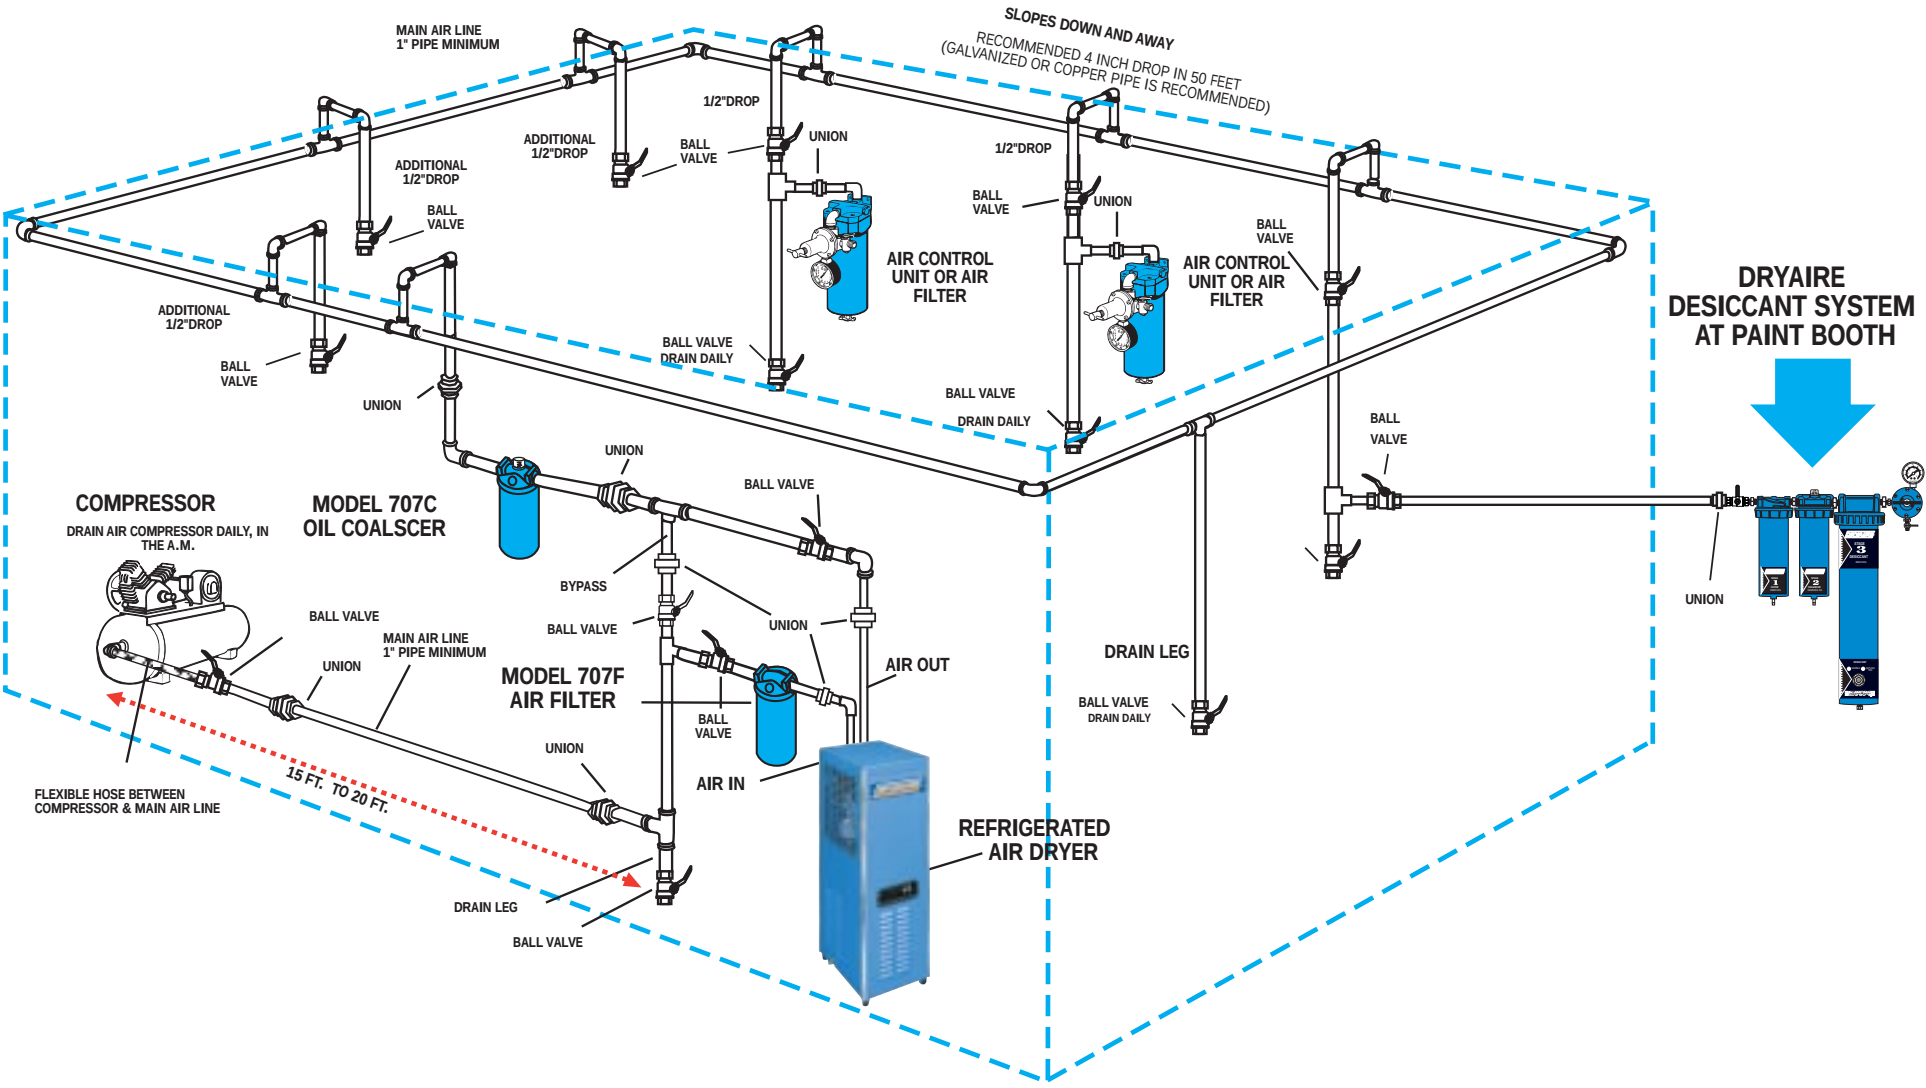
MAIN AIR LINE
1" PIPE MINIMUM
SLOPES DOWN AND AWAY
RECOMMENDED 4 INCH DROP IN 50 FEET
(GALVANIZED OR COPPER PIPE IS RECOMMENDED)
1/2"DROP
ADDITIONAL
1/2"DROP
BALL
VALVE
UNION
ADDITIONAL
1/2"DROP
BALL
VALVE
1/2"DROP
BALL
VALVE
UNION
BALL
VALVE
AIR CONTROL
UNIT OR AIR
FILTER
AIR CONTROL
UNIT OR AIR
FILTER
DRYAIRE
DESICCANT SYSTEM
AT PAINT BOOTH
ADDITIONAL
1/2"DROP
BALL
VALVE
UNION
BALL VALVE
DRAIN DAILY
BALL VALVE
DRAIN DAILY
BALL
VALVE
UNION
UNION
BALL VALVE
COMPRESSOR
DRAIN AIR COMPRESSOR DAILY, IN
THE A.M.
MODEL 707C
OIL COALSCER
BYPASS
BALL VALVE
BALL VALVE
UNION
UNION
MAIN AIR LINE
1" PIPE MINIMUM
MODEL 707F
AIR FILTER
AIR OUT
BALL
VALVE
DRAIN LEG
BALL VALVE
DRAIN DAILY
UNION
AIR IN
15 FT. TO 20 FT.
FLEXIBLE HOSE BETWEEN
COMPRESSOR & MAIN AIR LINE
REFRIGERATED
AIR DRYER
DRAIN LEG
BALL VALVE